


Technical Data

alkitronic® - CLD/L

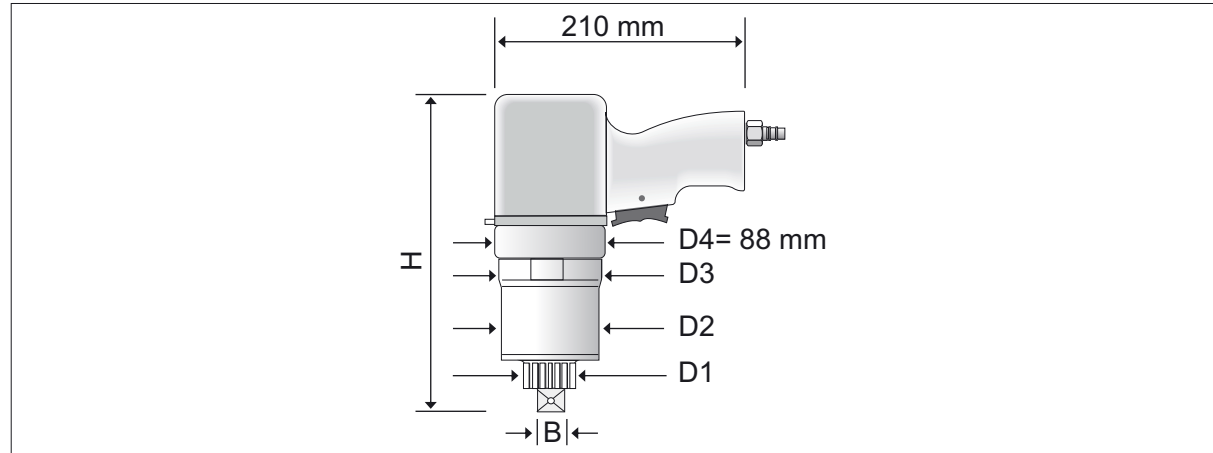

Annotations:

Torque regulation via air supply and a manostat of the maintenance unit.

Torque exactness depends on a stable air network.

An air pressure of 2 - 7 bars at an air volume of approx. 10-15 l/sec ensures optimal operating

Series CLD/L..	Type	CLD/L 1**	CLD/L 2	CLD/L 3	CLD/L 4	CLD/L 5	CLD/L 6	CLD/L 7
Torque range approx. *	Nm	75-225	135-390	165-485	305-895	365-1080	495-1450	645-1900
	ft.lbs	55-165	100-290	120-360	225-660	295-795	365-1070	475-1400
Square Drive	B	1/2"/3/4"	3/4"	3/4"	3/4"	3/4"	3/4"/1"	1"
Diameter D ₁	mm	41	41	41	41	41	41/54	54
Diameter D ₂	mm	88	88	88	88	88	88	88
Diameter D ₃	mm	85	85	85	85	85	85	85
Height (H) approx.	mm	255	255	255	275	275	275/300	300
Wt w/o support approx.	kg	6.3	6.3	6.3	7	7	7/7.3	7.3
Idle speed ca.	rmin ⁻¹	60	34	27	19	13	9	7

* **Attention:** Loosening torque of bolt might be up to 20% higher. Take care to secure and stable the reaction support.

** Output profile: Quick rotating tool

Subject to change without prior notice / E & OE / Figures can differ depending on type.